

## Exam Questions NSE7\_SDW-7.0

Fortinet NSE 7 - SD-WAN 7.0

[https://www.2passeasy.com/dumps/NSE7\\_SDW-7.0/](https://www.2passeasy.com/dumps/NSE7_SDW-7.0/)



**NEW QUESTION 1**

Refer to the exhibits.

**Exhibit A**

```

config duplication
  edit 1
    set srcaddr "10.0.1.0/24"
    set dstaddr "10.1.0.0/24"
    set srcintf "port5"
    set dstintf "overlay"
    set service "ALL"
    set packet-duplication force
  next
end

branch1_fgt # diagnose sys sdwan zone
Zone SASE index=2
  members(0):
Zone overlay index=4
  members(3): 19(T_INET_0_0) 20(T_INET_1_0) 21(T_MPLS_0)
Zone underlay index=3
  members(2): 3(port1) 4(port2)
Zone virtual-wan-link index=1
  members(0):

1.274665 port5 in 10.0.1.101 -> 10.1.0.7: icmp: echo request
1.275788 T_INET_0_0 out 10.0.1.101 -> 10.1.0.7: icmp: echo request
1.275790 T_INET_1_0 out 10.0.1.101 -> 10.1.0.7: icmp: echo request
1.275801 T_MPLS_0 out 10.0.1.101 -> 10.1.0.7: icmp: echo request
1.278365 T_INET_1_0 in 10.1.0.7 -> 10.0.1.101: icmp: echo reply
1.278553 port5 out 10.1.0.7 -> 10.0.1.101: icmp: echo reply

```

**Exhibit B**

```

3.874431 T_INET_1_0 in 10.0.1.101 -> 10.1.0.7: icmp: echo request
3.874630 port5 out 10.0.1.101 -> 10.1.0.7: icmp: echo request
3.874895 T_INET_0_0 in 10.0.1.101 -> 10.1.0.7: icmp: echo request
3.875125 T_MPLS_0 in 10.0.1.101 -> 10.1.0.7: icmp: echo request
3.875054 port5 in 10.1.0.7 -> 10.0.1.101: icmp: echo reply
3.875308 T_INET_1_0 out 10.1.0.7 -> 10.0.1.101: icmp: echo reply

```

Exhibit A shows the packet duplication rule configuration, the SD-WAN zone status output, and the sniffer output on FortiGate acting as the sender. Exhibit B shows the sniffer output on a FortiGate acting as the receiver.

The administrator configured packet duplication on both FortiGate devices. The sniffer output on the sender FortiGate shows that FortiGate forwards an ICMP echo request packet over three overlays, but it only receives one reply packet through T\_INET\_1\_0.

Based on the output shown in the exhibits, which two reasons can cause the observed behavior? (Choose two.)

- A. On the receiver FortiGate, packet-de-duplication is enabled.
- B. The ICMP echo request packets sent over T\_INET\_0\_0 and T\_MPLS\_0 were dropped along the way.
- C. The ICMP echo request packets received over T\_INET\_0\_0 and T\_MPLS\_0 were offloaded to NPU.
- D. On the sender FortiGate, duplication-max-num is set to 3.

**Answer: AD**

**NEW QUESTION 2**

Which are two benefits of using CLI templates in FortiManager? (Choose two.)

- A. You can reference meta fields.
- B. You can configure interfaces as SD-WAN members without having to remove references first.
- C. You can configure FortiManager to sync local configuration changes made on the managed device, to the CLI template.
- D. You can configure advanced CLI settings.

**Answer: AD**

**NEW QUESTION 3**

Which two statements describe how IPsec phase 1 main mode is different from aggressive mode when performing IKE negotiation? (Choose two)

- A. A peer ID is included in the first packet from the initiator, along with suggested security policies.
- B. XAuth is enabled as an additional level of authentication, which requires a username and password.
- C. A total of six packets are exchanged between an initiator and a responder instead of three packets.
- D. The use of Diffie Hellman keys is limited by the responder and needs initiator acceptance.

**Answer: BC**

**NEW QUESTION 4**

What does enabling the exchange-interface-ip setting enable FortiGate devices to exchange?

- A. The gateway address of their IPsec interfaces
- B. The tunnel ID of their IPsec interfaces
- C. The IP address of their IPsec interfaces
- D. The name of their IPsec interfaces

**Answer: C**

#### NEW QUESTION 5

Which are three key routing principles in SD-WAN? (Choose three.)

- A. FortiGate performs route lookups for new sessions only.
- B. Regular policy routes have precedence over SD-WAN rules.
- C. SD-WAN rules have precedence over ISDB routes.
- D. By default, SD-WAN members are skipped if they do not have a valid route to the destination.
- E. By default, SD-WAN rules are skipped if the best route to the destination is not an SD-WAN member.

**Answer: BDE**

#### NEW QUESTION 6

In the default SD-WAN minimum configuration, which two statements are correct when traffic matches the default implicit SD-WAN rule? (Choose two )

- A. Traffic has matched none of the FortiGate policy routes.
- B. Matched traffic failed RPF and was caught by the rule.
- C. The FIB lookup resolved interface was the SD-WAN interface.
- D. An absolute SD-WAN rule was defined and matched traffic.

**Answer: AC**

#### NEW QUESTION 7

Refer to the exhibit.

```
branch1_fgt # diagnose sys sdwan service 3

Service(3): Address Mode(IPV4) flags=0x200 use-shortcut-sla
  Gen(2), TOS(0x0/0x0), Protocol(0: 1->65535), Mode(priority), link-cost-factor(packet-
  loss), link-cost-threshold(0), health-check(VPN_PING)
  Members(3):
    1: Seq_num(3 T_INET_0_0), alive, packet loss: 2.000%, selected
    2: Seq_num(4 T_MPLS_0), alive, packet loss: 4.000%, selected
    3: Seq_num(5 T_INET_1_0), alive, packet loss: 12.000%, selected
  Src address(1):
    10.0.1.0-10.0.1.255

  Dst address(1):
    10.0.0.0-10.255.255.255

branch1_fgt (3) # show
config service
  edit 3
    set name "Corp"
    set mode priority
    set dst "Corp-net"
    set src "LAN-net"
    set health-check "VPN_PING"
    set link-cost-factor packet-loss
    set link-cost-threshold 0
    set priority-members 5 3 4
  next
end
```

The exhibit shows the SD-WAN rule status and configuration.

Based on the exhibit, which change in the measured packet loss will make T\_INET\_1\_0 the new preferred member?

- A. When all three members have the same packet loss.
- B. When T\_INET\_0\_0 has 4% packet loss.
- C. When T\_INET\_0\_0 has 12% packet loss.
- D. When T\_INET\_1\_0 has 4% packet loss.

**Answer: A**

#### NEW QUESTION 8

Which two settings can you configure to speed up routing convergence in BGP? (Choose two.)

- A. update-source
- B. set-route-tag
- C. holdtime-timer
- D. link-down-failover

Answer: CD

**NEW QUESTION 9**

Which components make up the secure SD-WAN solution?

- A. Application, antivirus, and URL, and SSL inspection
- B. Datacenter, branch offices, and public cloud
- C. FortiGate, FortiManager, FortiAnalyzer, and FortiDeploy
- D. Telephone, ISDN, and telecom network.

Answer: C

**NEW QUESTION 10**

Refer to the exhibits.

Exhibit A

Network Properties	
Service	Critical-DIA
Identity	
Device ID	FGVM01TM22000077
Device Name	branch1_fgt
Type	
Sub Type	sdwan
Type	event
Alerts	
Level	notice
General	
Log Description	SDWAN status
Log ID	0113022923
Message	Service prioritized by performance metric will be redirected in sequence order.
Sequence Number	2,1
Virtual Domain	root
Others	
Date/Time	23:57:29
Destination End User ID	3
Destination Endpoint ID	3
Device Time	2022-03-04 14:57:27
Event Time	1646434647595788893
Event Type	Service
Metric	latency
Service ID	1
Time Stamp	2022-03-04 23:57:29
Time Zone	-0800
UEBA Endpoint ID	3
UEBA User ID	3
logger	700030237

Exhibit B

```
branch1_fgt # diagnose sys sdwan member
Member(1): interface: port1, flags=0x0 , gateway: 192.2.0.2, priority: 0 1024, weight: 0
Member(2): interface: port2, flags=0x0 , gateway: 192.2.0.10, priority: 0 1024, weight: 0

config service
edit 1
set name "Critical-DIA"
set mode priority
set src "LAN-net"
set internet-service enable
set internet-service-app-ctrl 16354 41468 16920
set health-check "Level3_DNS"
set priority-members 1 2
next
end
```

Exhibit A shows an SD-WAN event log and exhibit B shows the member status and the SD-WAN rule configuration. Based on the exhibits, which two statements are correct? (Choose two.)

- A. FortiGate updated the outgoing interface list on the rule so it prefers port2.
- B. Port2 has the highest member priority.
- C. Port2 has a lower latency than port1.
- D. SD-WAN rule ID 1 is set to lowest cost (SLA) mode.

Answer: AC

**NEW QUESTION 10**

Refer to the exhibit.

```
session info: proto=6 proto_state=11 duration=242 expire=3349 timeout=3600
flags=00000000 socktype=0 sockport=0 av_idx=0 use=4
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=log dirty may_dirty ndr f00 app_valid
statistic(bytes/packets/allow_err): org=3421/20/1 reply=3777/17/1 tuples=3
tx speed(Bps/kbps): 0/0 rx speed(Bps/kbps): 0/0
orgin->sink: org pre->post, reply pre->post dev=7->3/3->7 gwy=0.0.0.0/0.0.0.0
hook=post dir=org act=snat 10.0.1.101:34676->128.66.0.1:22(192.2.0.1:34676)
hook=pre dir=reply act=dnat 128.66.0.1:22->192.2.0.1:34676(10.0.1.101:34676)
hook=post dir=reply act=noop 128.66.0.1:22->10.0.1.101:34676(0.0.0.0:0)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=2 pol_uid_idx=14721 auth_info=0 chk_client_info=0 vd=0
serial=000032d9 tos=ff/ff app_list=2000 app=16060 url_cat=0
sdwan_mbr_seq=1 sdwan_service_id=2
rpd_b_link_id=ff000002 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x001008
```

Which statement explains the output shown in the exhibit?

- A. FortiGate performed standard FIB routing on the session.
- B. FortiGate will not re-evaluate the session following a firewall policy change.
- C. FortiGate used 192.2.0.1 as the gateway for the original direction of the traffic.
- D. FortiGate must re-evaluate the session due to routing change.

**Answer: D**

**NEW QUESTION 11**

Which two statements about the SD-WAN zone configuration are true? (Choose two.)

- A. The service-sla-tie-break setting enables you to configure preferred member selection based on the best route to the destination.
- B. You can delete the default zones.
- C. The default zones are virtual-wan-link and SASE.
- D. An SD-WAN member can belong to two or more zones.

**Answer: AC**

**NEW QUESTION 12**

Refer to the exhibit.

```
branch1_fgt # diagnose firewall proute list
list route policy info(vf=root):

id=1 dscp_tag=0xff 0xff flags=0x0 tos=0x00 tos_mask=0x00 protocol=17 sport=0-65535 iif=7
dport=53 path(1) oif=3(port1)
source wildcard(1): 0.0.0.0/0.0.0.0
destination wildcard(1): 4.2.2.1/255.255.255.255
hit_count=0 last_used=2022-03-25 10:53:26

id=2131165185(0x7f070001) vw1_service=1(Critical-DIA) vw1_mbr_seq=1 2 dscp_tag=0xff 0xff
flags=0x0 tos=0x00 tos_mask=0x00 protocol=0 sport=0-65535 iif=0 dport=1-65535 path(2)
oif=3(port1) oif=4(port2)
source(1): 10.0.1.0-10.0.1.255
destination wildcard(1): 0.0.0.0/0.0.0.0
internet service(3): GoToMeeting(4294836966,0,0,0, 16354)
Microsoft.Office.365.Portal(4294837474,0,0,0, 41468) Salesforce(4294837976,0,0,0, 16920)
hit_count=0 last_used=2022-03-24 12:18:16

id=2131165186(0x7f070002) vw1_service=2(Non-Critical-DIA) vw1_mbr_seq=2 dscp_tag=0xff
0xff flags=0x0 tos=0x00 tos_mask=0x00 protocol=0 sport=0-65535 iif=0 dport=1-65535
path(1) oif=4(port2)
source(1): 10.0.1.0-10.0.1.255
destination wildcard(1): 0.0.0.0/0.0.0.0
internet service(2): Facebook(4294836806,0,0,0, 15832) Twitter(4294838278,0,0,0, 16001)
hit_count=0 last_used=2022-03-24 12:18:16

id=2131165187(0x7f070003) vw1_service=3(all_rules) vw1_mbr_seq=1 dscp_tag=0xff 0xff
flags=0x0 tos=0x00 tos_mask=0x00 protocol=0 sport=0-65535 iif=0 dport=1-65535 path(1)
oif=3(port1)
source(1): 0.0.0.0-255.255.255.255
destination(1): 0.0.0.0-255.255.255.255
hit count=0 last used=2022-03-25 10:58:12
```

Based on the output, which two conclusions are true? (Choose two.)

- A. There is more than one SD-WAN rule configured.
- B. The SD-WAN rules take precedence over regular policy routes.
- C. The all\_rules rule represents the implicit SD-WAN rule.
- D. Entry 1(id=1) is a regular policy route.

Answer: AD

#### NEW QUESTION 15

Refer to the exhibit.

```
config system sdwan
  set fail-detect enable
  set fail-alert-interfaces "port5"
  config health-check
    edit "Level3_DNS"
      set update-cascade-interface enable
      set members 1 2
    next
    edit "HQ"
      set update-cascade-interface enable
      set members 3
    next
  end
end
```

Based on the exhibit, which action does FortiGate take?

- A. FortiGate bounces port5 after it detects all SD-WAN members as dead.
- B. FortiGate fails over to the secondary device after it detects all SD-WAN members as dead.
- C. FortiGate brings up port5 after it detects all SD-WAN members as alive.
- D. FortiGate brings down port5 after it detects all SD-WAN members as dead.

Answer: B

#### NEW QUESTION 16

Which CLI command do you use to perform real-time troubleshooting for ADVPN negotiation?

- A. get router info routing-table all
- B. diagnose debug application ike
- C. diagnose vpn tunnel list
- D. get ipsec tunnel list

Answer: B

#### Explanation:

IKE real-time debug - useful when debugging ADVPN shortcut messages and spoke-to-spoke negotiations.

- diagnose debug console timestamp enable
- diagnose vpn ike log filter clear
- diagnose vpn ike log filter mdst-addr4 <ip.of.hub> <ip.of.spoke>
- diagnose debug application ike -1
- diagnose debug enable

#### NEW QUESTION 18

Which two tasks are part of using central VPN management? (Choose two.)

- A. You can configure full mesh, star, and dial-up VPN topologies.
- B. You must enable VPN zones for SD-WAN deployments.
- C. FortiManager installs VPN settings on both managed and external gateways.
- D. You configure VPN communities to define common IPsec settings shared by all VPN gateways.

Answer: AD

#### NEW QUESTION 21

Refer to the exhibit.

```
config firewall policy
  edit 1
    set anti-replay disable
  next
end
```

In a dual-hub hub-and-spoke SD-WAN deployment, which is a benefit of disabling the anti-replay setting on the hubs?

- A. It instructs the hub to disable the reordering of TCP packets on behalf of the receiver, to improve performance.
- B. It instructs the hub to disable TCP sequence number check, which is required for TCP sessions originated from spokes to fail over back and forth between the hubs.
- C. It instructs the hub to not check the ESP sequence numbers on IPsec traffic, to improve performance.
- D. It instructs the hub to skip content inspection on TCP traffic, to improve performance.

Answer: B

#### NEW QUESTION 25

Refer to the exhibit.

```
# diagnose sys session list

session info: proto=6 proto_state=01 duration=39 expire=3593 timeout=3600 flags=00000000
socktype=0 sockport=0 av_idx=0 use=4
state=may_dirty npu
origin->sink: org pre->post, reply pre->post dev=7->5/5->7 gwy=10.10.10.1/10.9.31.160
hook=pre dir=org act=noop 10.9.31.160:7932->10.0.1.7:22(0.0.0.0:0)
hook=post dir=reply act=noop 10.0.1.7:22->10.9.31.160:7932(0.0.0.0:0)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00045e02 tos=ff/ff app_list=0 app=0 url_cat=0
sdwan_mbr_seq=1 sdwan_service_id=1
rpd_b_link_id=80000000 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x4000c00
npu info: flag=0x81/0x81, offload=8/8, ips_offload=0/0, epid=64/76, ipid=76/64,
vlan=0x0000/0x0000
vlifid=76/64, vtag_in=0x0000/0x0000 in_npu=1/1, out_npu=1/1, fwd_en=0/0, qid=2/2
reflect info 0:
dev=7->6/6->7
npu_state=0x4000800
npu info: flag=0x00/0x81, offload=0/8, ips_offload=0/0, epid=0/76, ipid=0/65, vlan=0x0000/0x0000
vlifid=0/65, vtag_in=0x0000/0x0000 in_npu=0/1, out_npu=0/1, fwd_en=0/0, qid=0/2
total reflect session num: 1
total session 1

# diagnose netlink interface list

if=port1 family=00 type=1 index=5 mtu=1500 link=0 master=0
if=port2 family=00 type=1 index=6 mtu=1500 link=0 master=0
if=port3 family=00 type=1 index=7 mtu=1500 link=0 master=0
```

The exhibit shows the details of a session and the index numbers of some relevant interfaces on a FortiGate appliance that supports hardware offloading. Based on the information shown in the exhibits, which two statements about the session are true? (Choose two.)

- A. The reply direction of the asymmetric traffic flows from port2 to port3.
- B. The auxiliary session can be offloaded to hardware.
- C. The original direction of the symmetric traffic flows from port3 to port2.
- D. The main session cannot be offloaded to hardware.

Answer: AB

#### NEW QUESTION 29

Refer to the exhibit.

```
config router bgp
  set as 65000
  set router-id 10.1.0.1
  set ibgp-multipath enable
  set additional-path enable
  set additional-path-select 3
  config neighbor-group
    edit "Branches_INET_0"
      set interface "T_INET_0_0"
      set remote-as 65000
      set update-source "T_INET_0_0"
    next
    edit "Branches_INET_1"
      set interface "T_INET_1_0"
      set remote-as 65000
      set update-source "T_INET_1_0"
    next
    edit "Branches_MPLS"
      set interface "T_MPLS_0"
      set remote-as 65000
      set update-source "T_MPLS_0"
    next
  end
  config neighbor-range
    edit 1
      set prefix 10.201.1.0 255.255.255.0
      set neighbor-group "Branches_INET_0"
    next
    edit 2
      set prefix 10.202.1.0 255.255.255.0
      set neighbor-group "Branches_INET_1"
    next
    edit 3
      set prefix 10.203.1.0 255.255.255.0
      set neighbor-group "Branches_MPLS"
    next
  end
  ...
end
```

The exhibit shows the BGP configuration on the hub in a hub-and-spoke topology. The administrator wants BGP to advertise prefixes from spokes to other spokes over the IPsec overlays, including additional paths. However, when looking at the spoke routing table, the administrator does not see the prefixes from other spokes and the additional paths.

Based on the exhibit, which three settings must the administrator configure inside each BGP neighbor group so spokes can learn other spokes prefixes and their additional paths? (Choose three.)

- A. Set additional-path to send
- B. Enable route-reflector-client
- C. Set advertisement-interval to the number of additional paths to advertise
- D. Set adv-additional-path to the number of additional paths to advertise
- E. Enable soft-reconfiguration

**Answer:** ABD

#### NEW QUESTION 34

Refer to the exhibit.

```
id=20085 trace_id=847 func=print_pkt_detail line=5428 msg="vd-root:0 received a
packet(proto=6, 10.1.10.1:33920->74.125.195.93:443) from port3. flag [.], seq
2018554516, ack 4141536963, win 2238"
id=20085 trace_id=847 func=resolve_ip_tuple_fast line=5508 msg="Find an existing
session, id-000008c1, original direction"
id=20085 trace id=847 func=shaper handler line=821 msg="exceeded shaper limit, drop"
```

Which conclusion about the packet debug flow output is correct?

- A. The original traffic exceeded the maximum packets per second of the outgoing interface, and the packet was dropped.
- B. The reply traffic exceeded the maximum bandwidth configured in the traffic shaper, and the packet was dropped.
- C. The original traffic exceeded the maximum bandwidth of the outgoing interface, and the packet was dropped.
- D. The original traffic exceeded the maximum bandwidth configured in the traffic shaper, and the packet was dropped.

**Answer:** D

#### NEW QUESTION 38

Refer to the exhibit.

```
branch1_fgt # diagnose sys sdwan service 1

Service(3): Address Mode(IPV4) flags=0x200 use-shortcut-sla
Gen(6), TOS(0x0/0x0), Protocol(0: 1->65535), Mode(manual)
Members(2):
  1: Seq_num(3 T_INET_0_0), alive, selected
  2: Seq_num(4 T_INET_1_0), alive, selected
Src address(1):
  10.0.1.0-10.0.1.255

Dst address(1):
  10.0.0.0-10.255.255.255

branch1_fgt # diagnose sys sdwan member | grep T_INET_
Member(3): interface: T_INET_0_0, flags=0x4 , gateway: 100.64.1.1, priority: 10 1024,
weight: 0
Member(4): interface: T_INET_1_0, flags=0x4 , gateway: 100.64.1.9, priority: 0 1024,
weight: 0

branch1_fgt # get router info routing-table all | grep T_INET_
S      10.0.0.0/8 [1/0] via T_INET_1_0 tunnel 100.64.1.9
```

An administrator is troubleshooting SD-WAN on FortiGate. A device behind branch1\_fgt generates traffic to the 10.0.0.0/8 network. The administrator expects the traffic to match SD-WAN rule ID 1 and be routed over T\_INET\_0\_0. However, the traffic is routed over T\_INET\_1\_0. Based on the output shown in the exhibit, which two reasons can cause the observed behavior? (Choose two.)

- A. The traffic matches a regular policy route configured with T\_INET\_1\_0 as the outgoing device.
- B. T\_INET\_1\_0 has a lower route priority value (higher priority) than T\_INET\_0\_0.
- C. T\_INET\_0\_0 does not have a valid route to the destination.
- D. T\_INET\_1\_0 has a higher member configuration priority than T\_INET\_0\_0.

Answer: AC

**Explanation:**

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Assigning-Priority-to-SD-WAN-Members-for-Defau>

**NEW QUESTION 43**

Refer to the exhibits.

Exhibit A

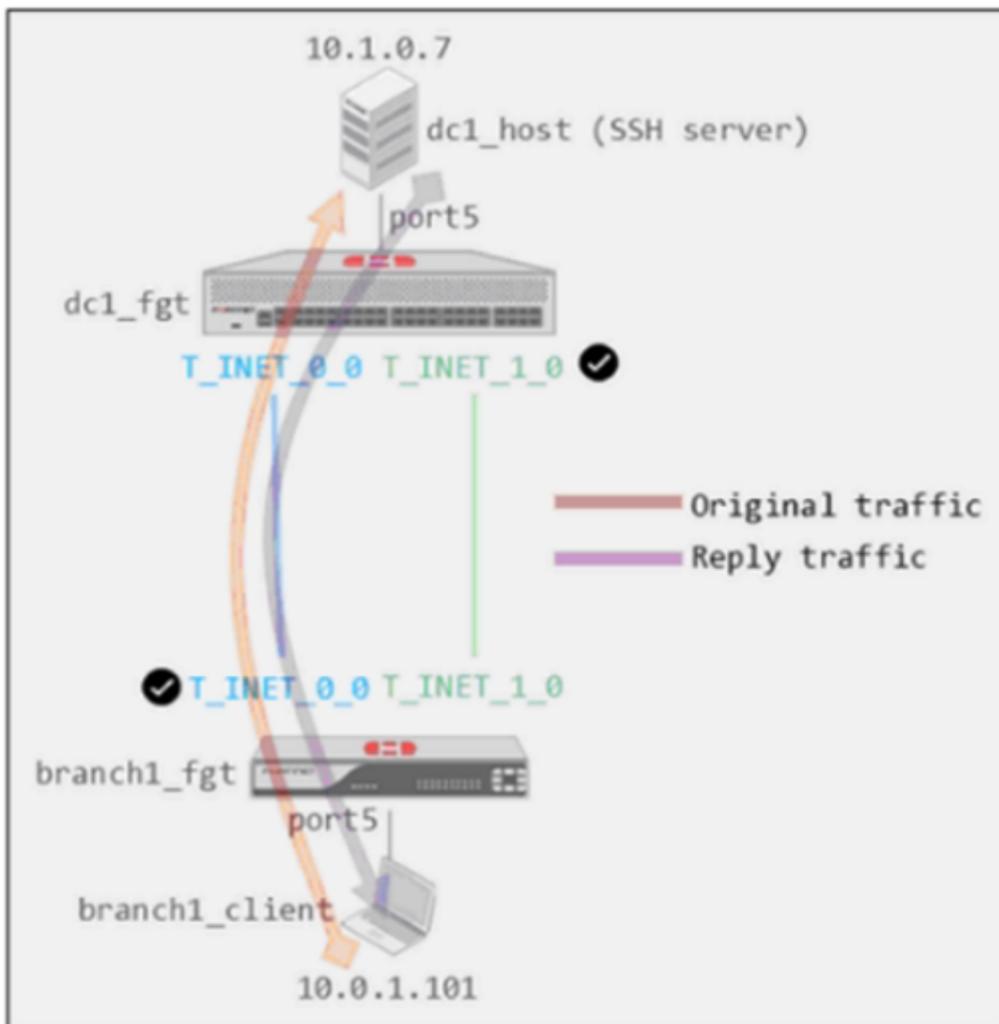


Exhibit B

```
dcl_fgt # show system global
config system global
  set admin-https-redirect disable
  set admintimeout 480
  set alias "FortiGate-VM64"
  set hostname "dcl_fgt"
  set timezone 04
end

dcl_fgt # show system settings
config system settings
  set tcp-session-without-syn enable
  set allow-subnet-overlap enable
  set gui-allow-unnamed-policy enable
  set gui-multiple-interface-policy enable
end
```

Exhibit A shows a site-to-site topology between two FortiGate devices: branch1\_fgt and dc1\_fgt. Exhibit B shows the system global and system settings configuration on dc1\_fgt.

When branch1\_client establishes a connection to dc1\_host, the administrator observes that, on dc1\_fgt, the reply traffic is routed over T\_INET\_0\_0, even though T\_INET\_1\_0 is the preferred member in the matching SD-WAN rule.

Based on the information shown in the exhibits, what configuration change must be made on dc1\_fgt so dc1\_fgt routes the reply traffic over T\_INET\_1\_0?

- A. Enable auxiliary-session under config system settings.
- B. Disable tp-session-without-syn under config system settings.
- C. Enable snat-route-change under config system global.
- D. Disable allow-subnet-overlap under config system settings.

**Answer:** A

**Explanation:**

Controlling return path with auxiliary session When multiple incoming or outgoing interfaces are used in ECMP or for load balancing, changes to routing, incoming, or return traffic interfaces impacts how an existing sessions handles the traffic. Auxiliary sessions can be used to handle these changes to traffic patterns.<https://docs.fortinet.com/document/fortigate/7.0.11/administration-guide/14295/controlling-return-path>

**NEW QUESTION 48**


Which two statements are true about using SD-WAN to steer local-out traffic? (Choose two.)

- A. FortiGate does not consider the source address of the packet when matching an SD-WAN rule for local-out traffic.
- B. By default, local-out traffic does not use SD-WAN.
- C. By default, FortiGate does not check if the selected member has a valid route to the destination.
- D. You must configure each local-out feature individually, to use SD-WAN.

**Answer:** BD

**NEW QUESTION 51**

Refer to the exhibit.

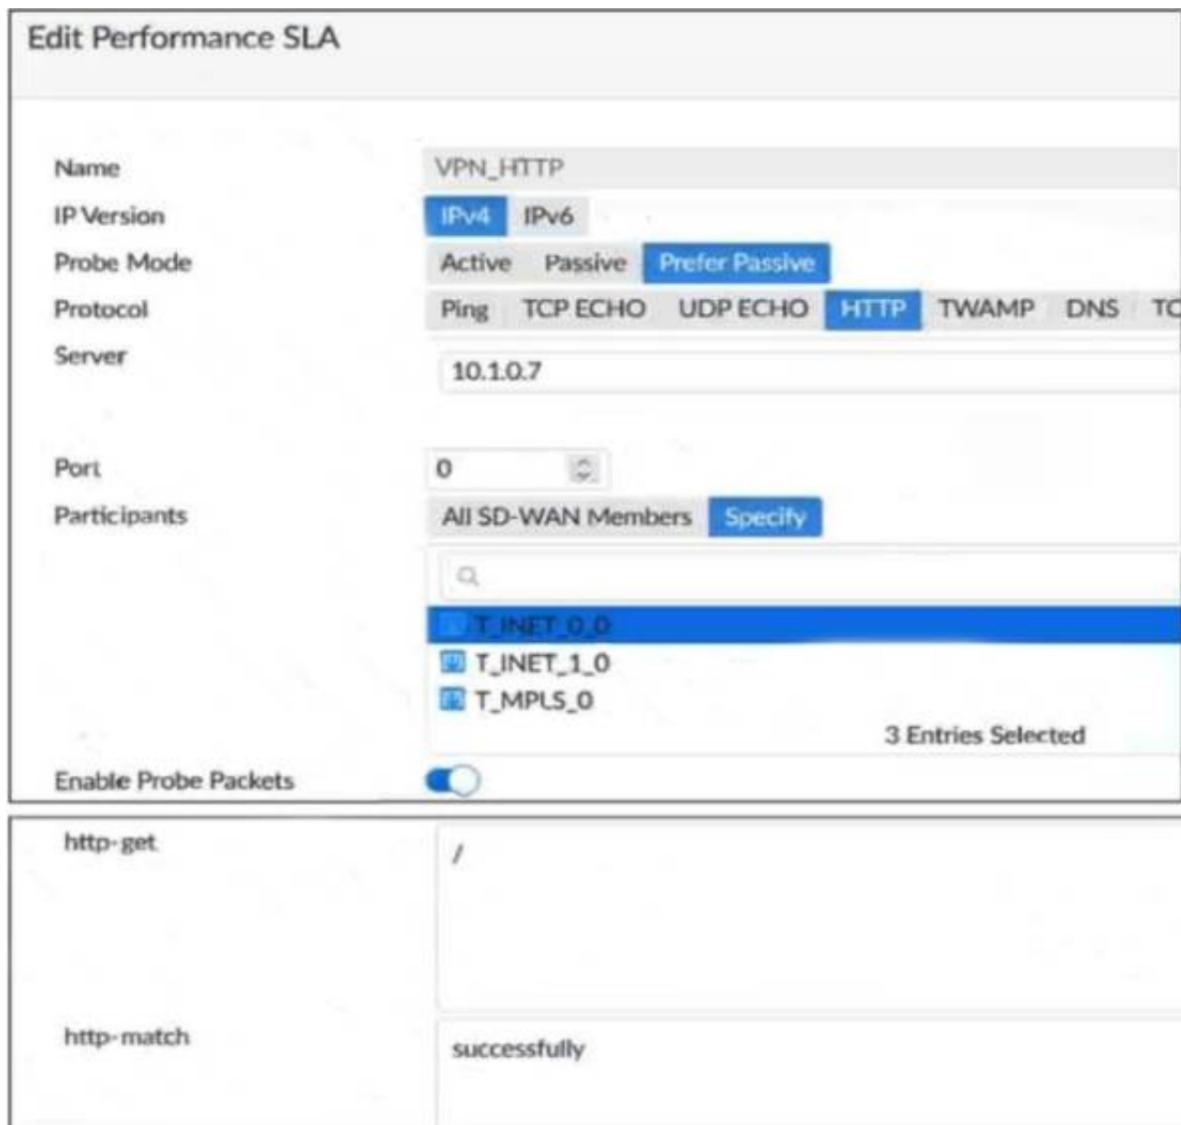

Based on the exhibit, which two statements are correct about the health of the selected members? (Choose two.)

- A. After FortiGate switches to active mode, FortiGate never fails back to passive monitoring.
- B. During passive monitoring, FortiGate can't detect dead members.
- C. FortiGate can offload the traffic that is subject to passive monitoring to hardware.
- D. FortiGate passively monitors the member if TCP traffic is passing through the member.

Answer: BD

**NEW QUESTION 55**

Which two interfaces are considered overlay links? (Choose two.)

- A. LAG
- B. IPsec
- C. Physical
- D. GRE

Answer: BD

**NEW QUESTION 59**

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual NSE7\_SDW-7.0 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the NSE7\_SDW-7.0 Product From:

[https://www.2passeasy.com/dumps/NSE7\\_SDW-7.0/](https://www.2passeasy.com/dumps/NSE7_SDW-7.0/)

## Money Back Guarantee

### **NSE7\_SDW-7.0 Practice Exam Features:**

- \* NSE7\_SDW-7.0 Questions and Answers Updated Frequently
- \* NSE7\_SDW-7.0 Practice Questions Verified by Expert Senior Certified Staff
- \* NSE7\_SDW-7.0 Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* NSE7\_SDW-7.0 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year