

Fortinet

Exam Questions NSE7_EFW-7.0

Fortinet NSE 7 - Enterprise Firewall 7.0



NEW QUESTION 1

Which two statements about bulk configuration changes made using FortiManager CLI scripts are correct? (Choose two.)

- A. When run on the Device Database, you must use the installation wizard to apply the changes to the managed FortiGate device.
- B. When run on the Remote FortiGate directly, administrators do not have the option to review the changes prior to installation.
- C. When run on the All FortiGate in ADOM, changes are automatically installed without the creation of a new revision history.
- D. When run on the Policy Package, ADOM database, changes are applied directly to the managed FortiGate device.

Answer: AB

NEW QUESTION 2

Examine the following partial outputs from two routing debug commands; then answer the question below.

```
# get router info kernel
tab=254 vf=0 scope=0type=1 proto=11 prio=0 0.0.0.0/0.0.0.0/0->0.0.0.0/0 pref=0.0.0.0 gwy=10.200.1.254 dev=2(port1)
tab=254 vf=0 scope=0type=1 proto=11 prio=10 0.0.0.0/0.0.0.0/0->0.0.0.0/0 pref=0.0.0.0 gwy=10.200.2.254 dev=3(port2)
tab=254 vf=0 scope=253type=1 proto=2 prio=0 0.0.0.0/0.0.0.0/.->10.0.1.0/24 pref=10.0.1.254
gwy=0.0.0.0 dev=4(port3)
# get router info routing-table all s*0.0.0.0/ [10/0] via 10.200.1.254, port1 [10/0] via 10.200.2.254, port2, [10/0] d0.0.1.0/24 is directly connected, port3
d0.200.1.0/24 is directly connected, port1 d0.200.2.0/24 is directly connected, port2
```

Which outbound interface or interfaces will be used by this FortiGate to route web traffic from internal users to the Internet?

- A. port1
- B. port2.
- C. Both port1 and port2.
- D. port3.

Answer: B

NEW QUESTION 3

Refer to the exhibit, which contains partial output from an IKE real-time debug.

```
ike 0: comes 10.0.0.2:500->10.0.0.1:500,ifindex=7...
ike 0: IKEv1 exchange=Aggressive id=a2fbd6bb6394401a/06b89c022d4df682 len=426
ike 0:Remotesite:3: initiator: aggressive mode get 1st response...
ike 0:Remotesite:3: VID DPD AFCAD71368A1F1C96B8696FC77570100
ike 0:Remotesite:3: DPD negotiated
ike 0:Remotesite:3: VID FORTIGATE 8299031757A36082C6A621DE00000000
ike 0:Remotesite:3: peer is FortiGate/FortiOS (v0 b0)
ike 0:Remotesite:3: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3
ike 0:Remotesite:3: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3C0000000
ike 0:Remotesite:3: received peer identifier FQDN 'remote'
ike 0:Remotesite:3: negotiation result
ike 0:Remotesite:3: proposal id = 1:
ike 0:Remotesite:3:   protocol id = ISAKMP:
ike 0:Remotesite:3:   trans_id = KEY_IKE.
ike 0:Remotesite:3:   encapsulation = IKE/none
ike 0:Remotesite:3:   type=OAKLEY_ENCRYPT_ALG, val=AES_CBC, key-len=128
ike 0:Remotesite:3:   type=OAKLEY_HASH_ALG, val=SHA.
ike 0:Remotesite:3:   type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:Remotesite:3:   type=OAKLEY_GROUP, val=MODP1024.
ike 0:Remotesite:3: ISAKMP SA lifetime=86400
ike 0:Remotesite:3: NAT-T unavailable
ike 0:Remotesite:3: ISAKMP SA a2fbd6bb6394401a/06b89c022d4df682 key 16:39915120ED73E520787C801DE3678916
ike 0:Remotesite:3: PSK authentication succeeded
ike 0:Remotesite:3: authentication OK
ike 0:Remotesite:3: add INITIAL-CONTACT
ike 0:Remotesite:3: enc A2FBD6BB6394401A06B89C022D4DF682081004010000000000000500B000018882A078E09026CA8B2
ike 0:Remotesite:3: out A2FBD6BB6394401A06B89C022D4DF6820810040100000000000005C64D5CBA90B873F150CB8B5CC2A
ike 0:Remotesite:3: sent IKE msg (agg_i2send): 10.0.0.1:500->10.0.0.2:500, len=140, id=a2fbd6bb6394401a/
ike 0:Remotesite:3: established IKE SA a2fbd6bb6394401a/06b89c022d4df682
```

Which two statements about this debug output are correct? (Choose two.)

- A. The initiator provided remote as its IPsec peer ID.
- B. It shows a phase 2 negotiation.
- C. Perfect Forward Secrecy (PFS) is enabled in the configuration.
- D. The local gateway IP address is 10.0.0.1.

Answer: AD

Explanation:

A because : received peer identifier FQDN 'remote' D because : ike 0: comes 10.0.0.2:500 -> 10.0.0.1:500

NEW QUESTION 4

A FortiGate is rebooting unexpectedly without any apparent reason. What troubleshooting tools could an administrator use to get more information about the problem? (Choose two.)

- A. Firewall monitor.
- B. Policy monitor.
- C. Logs.

D. Crashlogs.

Answer: CD

NEW QUESTION 5

An administrator has decreased all the TCP session timers to optimize the FortiGate memory usage. However, after the changes, one network application started to have problems. During the troubleshooting, the administrator noticed that the FortiGate deletes the sessions after the clients send the SYN packets, and before the arrival of the SYN/ACKs. When the SYN/ACK packets arrive to the FortiGate, the unit has already deleted the respective sessions. Which TCP session timer must be increased to fix this problem?

- A. TCP half open.
- B. TCP half close.
- C. TCP time wait.
- D. TCP session time to live.

Answer: A

Explanation:

http://docs-legacy.fortinet.com/fos40hlp/43prev/wwhelp/wwhimpl/common/html/wwhelp.htm?context=fgt&file=CLI_get_Commands.58.25.html

The tcp-halfopen-timer controls for how long, after a SYN packet, a session without SYN/ACK remains in the table.

The tcp-halfclose-timer controls for how long, after a FIN packet, a session without FIN/ACK remains in the table.

The tcp-timewait-timer controls for how long, after a FIN/ACK packet, a session remains in the table. A closed session remains in the session table for a few seconds more to allow any out-of-sequence packet.

NEW QUESTION 6

View the exhibit, which contains the partial output of an IKE real-time debug, and then answer the question below.

```
ike 0: comes 10.0.0.2:500-> 10.0.0.1:500, ifindex-7...
ike 0: IKEV1 exchange-Aggressive id-baf47d0988e9237f/2f405ef3952f6fda len 430
ike 0: in
BAF47D0988E9237F2F405EF3952F6FDA011004000000000000001AE0400003C0000000100000001000000300101000
ike 0: RemoteSite:4: initiator: aggressive mode get 1st response
ike 0: RemoteSite:4: VID RFC 3947 4A131C81070358455C5728F20E95452F
ike 0: RemoteSite:4: VID DPD AFCAD71368A1P1c96B8696FC77570100
ike 0: RemoteSite:4: VID FORTIGATE 8299031757A36082C6A621DE000502D7
ike 0: RemoteSite:4: peer is FortiGate/PortiOS (v6 b932)
ike 0: RemoteSite:4: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3
ike 0: RemoteSite:4: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3C0000000
ike 0: RemoteSite:4: received peer identifier PQDN 'remote'
ike 0: RemoteSite:4: negotiation result
ike 0: RemoteSite:4: proposal id = 1:
ike 0: RemoteSite:4:   protocol id - ISAKMP:
ike 0: RemoteSite:4:   trans_id - KEY_IKE.
ike 0: RemoteSite:4:   encapsulation - IKE/none
ike 0: RemoteSite:4:   type=OAKLEY_ENCRYPT_ALG, val=AES_CBC, key-len=128
ike 0: RemoteSite:4:   type=OAKLEY_HASH_ALG, val-SHA
ike 0: RemoteSite:4:   type=AUTH_METHOD, val-PRESHARED_KEY.
ike 0: RemoteSite:4:   type=OAKLEY_GROUP, val=MODF1024.
ike 0: RemoteSite:4: ISAKMP SA lifetime=86400
ike 0: RemoteSite:4: ISAKMP SA baf47d0988e9237f/2f405ef3952f6fda key
16:B25B6C9384D8BDB24E3DA3DC90CF5E73
ike 0: RemoteSite:4: PSK authentication succeeded
ike 0: RemoteSite:4: authentication OK
ike 0: RemoteSite:4: add INITIAL-CONTACT
ike 0: RemoteSite:4: enc
BAF47D0988E9237F2F405EF3952F6FDA08100401000000000000080140000181F2E48BFD8E9D603F
ike 0: RemoteSite:4: out
BAF47D0988E9237F2F405EF3952F6FDA0810040100000000000008c2E3FC9BA061816A396F009A12
ike 0: RemoteSite:4: sent IKE msg (agg_12send) : 10.0.0.1:500 ->10.0.0.2:500, len-140, id-
baf47d0988e9237f/2
ike 0: RemoteSite:4: established IKE SA baf47d0988e9237f/2f405ef3952f6fda
```

Which statements about this debug output are correct? (Choose two.)

- A. The remote gateway IP address is 10.0.0.1.
- B. It shows a phase 1 negotiation.
- C. The negotiation is using AES128 encryption with CBC hash.
- D. The initiator has provided remote as its IPsec peer ID.

Answer: BD

NEW QUESTION 7

Refer to the exhibit, which contains the partial output of a diagnose command.

```
Spoke-2 # dia vpn tunnel list
list all ipsec tunnel in vd 0

-----
name=VPN ver=1 serial=1 10.200.5.1:0->10.200.4.1:0
bound_if=3 lgwy=static/1 tun=intf/0 mode=auto/1 encap=none/0
proxyid_num=1 child_num=0 refcnt=15 ilast=10 olast=792 auto-discovery=0
stat: rxp=0 txp=0 rxb=0 txb=0
dpd: mode=on-demand on=1 idle=20000ms retry=3 count=0 seqno=0
natt: mode=none draft=0 interval=0 remote_port=0
proxyid=VPN proto=0 sa=1 ref=2 serial=1
  src: 0:10.1.2.0/255.255.255.0:0
  dst: 0:10.1.1.0/255.255.255.0:0
  SA: ref=3 options=2e type=00 soft=0 mtu=1438 expire=42403/0B replaywin=2048 seqno=1 esn=0
replaywin_lastseq=00000000
life: type=01 bytes=0/0 timeout=43177/43200
dec: spi=cccl1f66d esp=aes key=16 280e5cd6f9bacc65ac771556c464ffbd
  ah=sha1 key=20 c68091d68753578785de6a7a6b276b506c527efe
enc: spi=df14200b esp=aes key=16 b02a7e9f5542b69aff6aa391738ee393
  ah=sha1 key=20 889f7529887c215c25950be2ba83e6fe1a5367be
dec: pkts/bytes=0/0, enc:pkts/bytes=0/0
```

Based on the output, which two statements are correct? (Choose two.)

- A. Anti-replay is enabled
- B. The remote gateway IP is 10.200.4.1.
- C. DPD is disabled.
- D. Quick mode selectors are disabled.

Answer: AB

NEW QUESTION 8

Refer to the exhibit, which contains a CLI script configuration on FortiManager.

Script Name	Static Route
Comments	<div style="border: 1px solid #ccc; height: 60px; width: 100%;"></div>
Type	CLI Script
Run script on	Remote FortiGate Directly (...)
Script details	<pre># conf rout stat # edit 0 # set gateway 10.20.121.2 # set priority 20 # set device "wan1" # next # end</pre>

An administrator configured the CLI script on FortiManager, but the script failed to apply any changes to the managed device after being executed. What are two reasons why the script did not make any changes to the managed device? (Choose two.)

- A. Static routes can be added using only TCL scripts.
- B. The commands that start with the # sign did not run.
- C. CLI scripts must start with #!.
- D. Incomplete commands can cause CLI scripts to fail.

Answer: BD

Explanation:

ref CLI scripts do not include Tool Command Language (Tcl) commands, and the first line of the script is not "#!" as it is for Tcl scripts.
https://help.fortinet.com/fmgr/50hlp/56/5-6-1/FortiManager_Admin_Guide/1000_Device%20Manager/2400_Sc

NEW QUESTION 9

Examine the output of the 'diagnose ips anomaly list' command shown in the exhibit; then answer the question below.

```
# diagnose ips anomaly list

list nids meter:
id=ip_dst_session    ip=192.168.1.10    dos_id=2  exp=3646  pps=0  freq=0
id=udp_dst_session   ip=192.168.1.10    dos_id=2  exp=3646  pps=0  freq=0
id=udp_scan          ip=192.168.1.110   dos_id=1  exp=649   pps=0  freq=0
id=udp_flood         ip=192.168.1.110   dos_id=2  exp=653   pps=0  freq=0
id=tcp_src_session   ip=192.168.1.110   dos_id=1  exp=5175  pps=0  freq=8
id=tcp_port_scan     ip=192.168.1.110   dos_id=1  exp=175   pps=0  freq=0
id=ip_src_session    ip=192.168.1.110   dos_id=1  exp=5649  pps=0  freq=30
id=udp_src_session   ip=192.168.1.110   dos_id=1  exp=5649  pps=0  freq=22
```

Which IP addresses are included in the output of this command?

- A. Those whose traffic matches a DoS policy.
- B. Those whose traffic matches an IPS sensor.
- C. Those whose traffic exceeded a threshold of a matching DoS policy.
- D. Those whose traffic was detected as an anomaly by an IPS sensor.

Answer: A

NEW QUESTION 10

Which two statements about OCVPN are true? (Choose two.)

- A. Only root vdom supports OCVPN.
- B. OCVPN supports static and dynamic IPs in WAN interface.
- C. OCVPN offers only Hub-Spoke VPNs.
- D. FortiGate devices under different FortiCare accounts can be used to form OCVPN.

Answer: AB

NEW QUESTION 10

Examine the partial output from two web filter debug commands; then answer the question below:

```
# diagnose test application urlfilter 3
Domain | IP      DB Ver  T URL
34000000| 34000000  16.40224 P Bhttp://www.fgt99.com/
# get webfilter categories
g07 General Interest - Business:
  34 Finance and Banking
  37 Search Engines and Portals
  43 General Organizations
  49 Business
  50 Information and Computer Security
  51 Government and Legal Organizations
  52 Information Technology
```

Based on the above outputs, which is the FortiGuard web filter category for the web site www.fgt99.com?

- A. Finance and banking
- B. General organization.
- C. Business.
- D. Information technology.

Answer: C

NEW QUESTION 11

Refer to the exhibit, which contains the output of diagnose sys session list.

```
# diagnose sys session list
session info: proto=6 proto_state=01 duration=73 expire=3597 timeout=3600
flags=00000000 sockflag=00000000 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=may_dirty synced none app_ntf
statistic(bytes/packets/allow_err): org=822/11/1 reply=9037/15/1 tuples=2
origin->sink: org pre->post, reply pre->post dev=4->2/2->4
gwy=100.64.1.254/10.0.1.10
hook-post dir=org act=snat 10.0.1.10:65464->54.192.15.182:80(100.64.1.1:65464)
hook-pre dir-reply act=dnat 54.192.15.182:80->100.64.1.1:65464(10.0.1.10:65464)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00000098 tos=ff/ff ips_view=0 app_list=0 app=0
dd_type=0 dd_mode=0
```

If the HA ID for the primary unit is zero (0), which statement about the output is true?

- A. This session cannot be synced with the slave unit.
- B. The inspection of this session has been offloaded to the slave unit.
- C. The master unit is processing this traffic.
- D. This session is for HA heartbeat traffic.

Answer: C

NEW QUESTION 16

Examine the output of the 'get router info ospf interface' command shown in the exhibit; then answer the question below.

```
# get router info ospf interface port4
port4 is up, line protocol is up
  Internet Address 172.20.121.236/24, Area 0.0.0.0, MTU 1500
  Process ID 0, Router ID 0.0.0.4, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DROther, Priority 1
  Designated Router (ID) 172.20.140.2, Interface Address 172.20.121.2
  Backup Designated Router (ID) 0.0.0.1, Interface Address
  172.20.121.239
  Timer intervals configured, Hello 10.000, Dead 40, Wait 40, Retransmit
  5
    Hello due in 00:00:05
  Neighbor Count is 4, Adjacent neighbor count is 2
  Crypt Sequence Number is 411
  Hello received 106, sent 27, DD received 7 sent 9
  LS-Req received 2 sent 2, LS-Upd received 7 sent 5
  LS-Ack received 4 sent 3, Discarded 1
```

Which statements are true regarding the above output? (Choose two.)

- A. The port4 interface is connected to the OSPF backbone area.
- B. The local FortiGate has been elected as the OSPF backup designated router.
- C. There are at least 5 OSPF routers connected to the port4 network.
- D. Two OSPF routers are down in the port4 network.

Answer: AC

Explanation:

on BROADCAST network there are 4 neighbors, among which 1*DR +1*BDR. So our FG has 4 neighbors, but create adjacency only with 2 (with DR and BDR). 2 neighbors DROther (not down).

NEW QUESTION 20

View the exhibit, which contains the output of diagnose sys session stat, and then answer the question below.

```

NGFW-1 # diagnose sys session stat
misc info:      session_count=591  setup_rate=0  exp_count=0
clash=162  memory_tension_drop=0  ephemeral=0/65536
removeable=0
delete=0, flush=0, dev_down=0/0
TCP sessions:
    166 in NONE state
    1 in ESTABLISHED state
    3 in SYN_SENT state
    2 in TIME_WAIT state
firewall error stat:
error1=00000000
error2=00000000
error3=00000000
error4=00000000
tt=00000000
cont=00000000
ids_recv=00000000
url_recv=00000000
av_recv=00000000
fqdn_count=00000006
global: ses_limit=0  ses6_limit=0  rt_limit=0  rt6_limit=0

```

Which statements are correct regarding the output shown? (Choose two.)

- A. There are 0 ephemeral sessions.
- B. All the sessions in the session table are TCP sessions.
- C. No sessions have been deleted because of memory pages exhaustion.
- D. There are 166 TCP sessions waiting to complete the three-way handshake.

Answer: AC

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD40578>

NEW QUESTION 23

View the exhibit, which contains the output of a debug command, and then answer the question below.

```

#dia hardware sysinfo shm
SHM counter:      150
SHM allocated:    0
SHM total:        625057792
conserve mode: on - mem
system last entered: Mon Apr 24 16:36:37 2017
sys fd last entered: n/a
SHM FS total:    641236992
SHM FS free:     641208320
SHM FS avail:   641208320
SHM FS alloc:    28672

```

What statement is correct about this FortiGate?

- A. It is currently in system conserve mode because of high CPU usage.
- B. It is currently in FD conserve mode.
- C. It is currently in kernel conserve mode because of high memory usage.
- D. It is currently in system conserve mode because of high memory usage.

Answer: D

NEW QUESTION 28

View the global IPS configuration, and then answer the question below.

```
config ips global
  set fail-open disable
  set intelligent-mode disable
  set engine-count 0
  set algorithm engine-pick
end
```

Which of the following statements is true regarding this configuration?

- A. IPS will scan every byte in every session.
- B. FortiGate will spawn IPS engine instances based on the system load.
- C. New packets will be passed through without inspection if the IPS socket buffer runs out of memory.
- D. IPS will use the faster matching algorithm which is only available for units with more than 4 GB memory.

Answer: A

NEW QUESTION 31


A FortiGate's port1 is connected to a private network. Its port2 is connected to the Internet. Explicit web proxy is enabled in port1 and only explicit web proxy users can access the Internet. Web cache is NOT enabled. An internal web proxy user is downloading a file from the Internet via HTTP. Which statements are true regarding the two entries in the FortiGate session table related with this traffic? (Choose two.)

- A. Both session have the local flag on.
- B. The destination IP addresses of both sessions are IP addresses assigned to FortiGate's interfaces.
- C. One session has the proxy flag on, the other one does not.
- D. One of the sessions has the IP address of port2 as the source IP address.

Answer: AD

NEW QUESTION 32

Examine the output of the 'diagnose debug rating' command shown in the exhibit; then answer the question below.

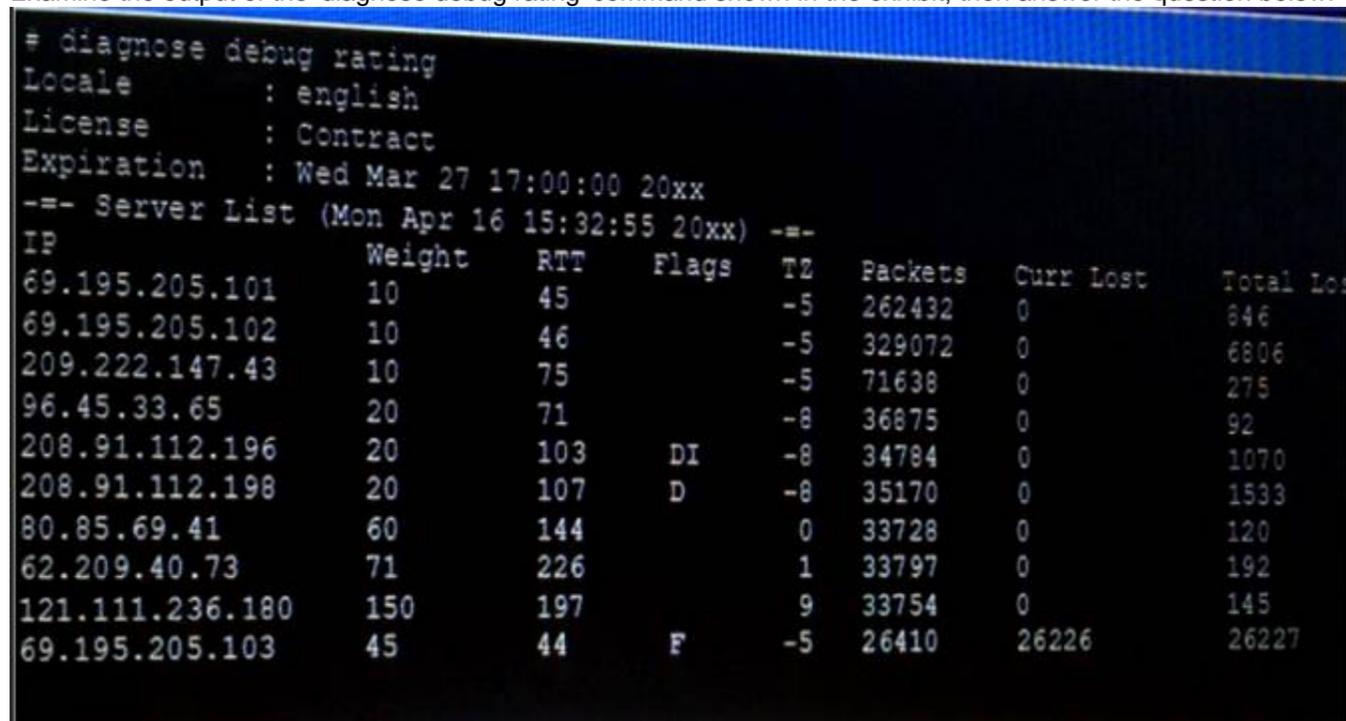

```
# diagnose debug rating
Locale      : english
License     : Contract
Expiration  : Wed Mar 27 17:00:00 20xx
-- Server List (Mon Apr 16 15:32:55 20xx) --
IP          Weight  RTT   Flags  TZ   Packets  Curr Lost  Total Lost
69.195.205.101  10     45    -5     -5   262432   0          846
69.195.205.102  10     46    -5     -5   329072   0          6806
209.222.147.43  10     75    -5     -5   71638    0          275
96.45.33.65    20     71    -8     -8   36875    0          92
208.91.112.196  20     103   DI     -8   34784    0          1070
208.91.112.198  20     107   D      -8   35170    0          1533
80.85.69.41    60     144   0      0    33728    0          120
62.209.40.73   71     226   1      1    33797    0          192
121.111.236.180 150    197   9      9    33754    0          145
69.195.205.103  45     44    F      -5   26410    26226     26227
```

Which statement are true regarding the output in the exhibit? (Choose two.)

- A. There are three FortiGuard servers that are not responding to the queries sent by the FortiGate.
- B. The TZ value represents the delta between each FortiGuard server's time zone and the FortiGate's time zone.
- C. FortiGate will send the FortiGuard queries to the server with highest weight.
- D. A server's round trip delay (RTT) is not used to calculate its weight.

Answer: BC

NEW QUESTION 33

Refer to the exhibit, which shows the output of a debug command.

```
FGT # get router info ospf interface port4
port4 is up, line protocol is up
Internet Address 172.20.121.236/24, Area 0.0.0.0, MTU 1500
Process ID 0, Router ID 0.0.0.4, Network Type BROADCAST, Cost: 1
Transmit Delay is 1 sec, State DROther, Priority 1
Designated Router (ID) 172.20.140.2, Interface Address 172.20.121.2
Backup Designated Router (ID) 0.0.0.1, Interface Address 172.20.121.239
Timer intervals configured, Hello 10.000, Dead 40, Wait 40, Retransmit 5
Hello due in 00:00:05
Neighbor Count is 4, Adjacent neighbor count is 2
Crypt Sequence Number is 411
Hello received 106 sent 27, DD received 6 sent 3
LS-Req received 2 sent 2, LS-Upd received 7 sent 17
LS-Ack received 4 sent 3, Discarded 1
```

Which two statements about the output are true? (Choose two.)

- A. In the network connected to port 4, two OSPF routers are down.
- B. Based on the network type of port 4, OSPF hello packets will be sent to 224.0.0.5.
- C. Based on the network type of port 4, OSPF hello packets will be sent to 224.0.0.6.
- D. There are a total of 5 OSPF routers attached to the Port4 network segment.

Answer: BD

NEW QUESTION 35

View the exhibit, which contains the output of a debug command, and then answer the question below.

```
# diagnose hardware sysinfo conserve
memory conserve mode:          on
total RAM:                    3040 MB
memory used:                  2706 MB 89% of total RAM
Memory freeable:              334 MB 11% of total RAM
memory used + freeable threshold extreme: 2887 MB 95% of total RAM
memory used threshold red:    2675 MB 88% of total RAM
memory used threshold green:  2492 MB 82% of total RAM
```

Which one of the following statements about this FortiGate is correct?

- A. It is currently in system conserve mode because of high CPU usage.
- B. It is currently in extreme conserve mode because of high memory usage.
- C. It is currently in proxy conserve mode because of high memory usage.
- D. It is currently in memory conserve mode because of high memory usage.

Answer: D

NEW QUESTION 39

View the following FortiGate configuration.

```
config system global
    set snat-route-change disable
end
config router static
    edit 1
        set gateway 10.200.1.254
        set priority 5
        set device "port1"
    next
    edit 2
        set gateway 10.200.2.254
        set priority 10
        set device "port2"
    next
end
```

All traffic to the Internet currently egresses from port1. The exhibit shows partial session information for Internet traffic from a user on the internal network:

```
# diagnose sys session list
session info: proto=6 proto_state+01 duration=17 expire=7 timeout=3600
flags=00000000 sockflag=00000000 sockport=0 av_idx=0 use=3
ha_id=0 policy_dir=0 tunnel=/
state=may_dirty none app_ntf
statistic(bytes/packets/allow_err): org=57555/7/1 reply=23367/19/1 tuples=2
orgin->sink: org pre->post, reply pre->post dev=4->2/2->4
gwy=10.200.1.254/10.0.1.10
hook=post dir=org act=snat 10.0.1.10:64907-
>54.239.158.170:80(10.200.1.1:64907)
hook=pre dir=reply act=dnat 54.239.158.170:80-
>10.200.1.1:64907(10.0.1.10:64907)
pos/(before, after) 0/(0,0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00000294 tos=ff/ff ips_view=0 app_list=0 app=0
dd_type=0 dd_mode=0
```

If the priority on route ID 1 were changed from 5 to 20, what would happen to traffic matching that user's session?

- A. The session would remain in the session table, and its traffic would still egress from port1.
- B. The session would remain in the session table, but its traffic would now egress from both port1 and port2.
- C. The session would remain in the session table, and its traffic would start to egress from port2.
- D. The session would be deleted, so the client would need to start a new session.

Answer: A

Explanation:

<http://kb.fortinet.com/kb/documentLink.do?externalID=FD40943>

NEW QUESTION 40

View the exhibit, which contains a partial routing table, and then answer the question below.

```
FGT # get router info routing-table all
...
Routing table for VRF=7
C    10.73.9.0/24 is directly connected, port2

Routing table for VRF=12
C    10.1.0.0/24 is directly connected, port3
S    10.10.4.0/24 [10/0] via 10.1.0.100, port3
C    10.64.1.0/24 is directly connected, port1

Routing table for VRF=21
S    10.1.0.0/24 [10/0] via 10.72.3.254, port4
C    10.72.3.0/24 is directly connected, port4
S    192.168.2.0/24 [10/0] via 10.72.3.254, port4
...
```

Assuming all the appropriate firewall policies are configured, which of the following pings will FortiGate route? (Choose two.)

- A. Source IP address 10.1.0.24, Destination IP address 10.72.3.20.
- B. Source IP address 10.72.3.27, Destination IP address 10.1.0.52.
- C. Source IP address 10.72.3.52, Destination IP address 10.1.0.254.
- D. Source IP address 10.73.9.10, Destination IP address 10.72.3.15.

Answer: BC

NEW QUESTION 45

Examine the output from the 'diagnose debug authd fssolist' command; then answer the question below.

```
# diagnose debug authd fssolist —FSSO logons-IP: 192.168.3.1 User: STUDENT Groups: TRAININGAD/USERS Workstation: INTERNAL2. TRAINING. LAB The IP address 192.168.3.1 is
```

NOT the one used by the workstation INTERNAL2. TRAINING. LAB.

What should the administrator check?

- A. The IP address recorded in the logon event for the user STUDENT.
- B. The DNS name resolution for the workstation name INTERNAL2. TRAININ
- C. LAB.
- D. The source IP address of the traffic arriving to the FortiGate from the workstation INTERNAL2.TRAININ
- E. LAB.
- F. The reserve DNS lookup forthe IP address 192.168.3.1.

Answer: C

NEW QUESTION 48

Refer to the exhibit, which contains the partial output of a diagnose command.

```
Spoke-2 # dia vpn tunnel list
list all ipsec tunnel in vd 0
-----
name=VPN ver=1 serial=1 10.200.5.1:0 -> 10.200.4.1:0
bound_if=3 lgwy=statistic/1 tun=intf/0 mode=auto/1 encap=none/0
proxyid_num=1 child_num=0 refernt=15 ilast=10 olast=792 auto-discovery=0
stat: rxp=0 txp=0 rxb=0 txb=0
dpd: mode=on-demand on=1 idle=20000ms retry=3 count=0 seqno=0
natt: mode=none draft=0 interval=0 remote_port=0
proxyid=VPN proto=0 sa=1 ref=2 serial=1
  src: 0:10.1.2.0/255.255.255.0:0
  dat: 0:10.1.1.0/255.255.255.0:0
  SA: ref=3 options=2e type=00 soft=0 mtu=1438 expire=42403/OB replaywin=204B seqno=1
esn=replaywin_lastseq=00000000
  life: type=01 bytes=0/0 timeout=43177/43200
  dec: spi=ccclf66d esp=aes key=16 280e5cd6f9bacc65ac771556c464ffbd
      ah=shal key=20 c68091d68753578785de6a7a6b276b506e527
```

Based on the output, which two statements are correct? (Choose two.)

- A. Anti-replay is enabled.
- B. DPD is disabled.
- C. Remote gateway IP is 10.200.4.1.
- D. Quick mode selectors are disabled.

Answer: AC

NEW QUESTION 51

What does the dirty flag mean in a FortiGate session configured for NGFW policy mode?

- A. The existing session table entry has been updated with the app_id and the firewall policy table needs to be checked for a match.
- B. The application or URL category is unknown and needs to be rescanned by the IPS engine to try to identify the Layer 7 details.
- C. The URL category for this session has been updated by FortiGuard and the session needs to be checked against the policy again to ensure proper web filtering is applied.
- D. Traffic has been identified as coming from an application that is not allowed and the relevant replacement message needs to be displayed to the user, if configured.

Answer: A

Explanation:

Enterprise_Firewall_7.0_Study_Guide-Online.pdf p 99

NEW QUESTION 54

Refer to the exhibit, which shows the output of a diagnose command

```
FGT # diagnose debug rating
Locale      : english
Service     : Web-filter
Status      : Enable
License     : Contract
Service     : Antispam
Status      : Disable
Service     : Virus Outbreak Prevention
Status      : Disable
-- Server List (Mon Apr 19 10:41:32 20xx) --
IP          Weight  RTT    Flags  TZ   Packets  Curr Lost  Total Lost
64.26.151.37  10     45     -5     -5   262432   0          846
64.26.151.35  10     46     -5     -5   329072   0          6806
66.117.56.37  10     75     -5     -5   71638    0          275
65.210.95.240 20     71     -8     -8   36875    0          92
209.222.147.36 20    103    DI     -8   34784    0          1070
208.91.112.194 20    107    D      -8   35170    0          1533
96.45.33.65   60    144    0      0    33728    0          120
80.85.69.41   71    226    1      1    33797    0          192
62.209.40.74  150   97     9      9    33754    0          145
121.111.236.179 45    44     F      -5   26410    26226     26227
```

What can you conclude from the RTT value?

- A. Its value represents the time it takes to receive a response after a rating request is sent to a particular server.
- B. Its value is incremented with each packet lost.
- C. It determines which FortiGuard server is used for license validation.
- D. Its initial value is statically set to 10.

Answer: A

NEW QUESTION 59

What configuration changes can reduce the memory utilization in a FortiGate? (Choose two.)

- A. Reduce the session time to live.
- B. Increase the TCP session timers.
- C. Increase the FortiGuard cache time to live.
- D. Reduce the maximum file size to inspect.

Answer: AD

NEW QUESTION 63

When using the SSL certificate inspection method for HTTPS traffic, how does FortiGate filter web requests when the browser client does not provide the server name indication (SNI) extension?

- A. FortiGate uses CN information from the Subject field in the server's certificate.
- B. FortiGate switches to the full SSL inspection method to decrypt the data.
- C. FortiGate blocks the request without any further inspection.
- D. FortiGate uses the requested URL from the user's web browser.

Answer: A

NEW QUESTION 68

Which action will FortiGate take when using the default settings for SSL certificate inspection, where the server name indication (SNI) does not match either the common name (CN) or any of the subject alternative names (SAN) in the server certificate?

- A. FortiGate uses the CN information from the Subject field in the server certificate.
- B. FortiGate uses the first entry listed in the SAN field in the server certificate.
- C. FortiGate uses the SNI from the user's web browser.
- D. FortiGate closes the connection because this represents an invalid SSL/TLS configuration.

Answer: A

Explanation:

#Config firewall ssl-ssh-profile

edit <profile_name> config https

set sni-server-cert-check [enable* | strict | disable]

Enable: If the SNI does NOT match the CN or SAN fields in the returned server's certificate, FG uses the CN field instead of the SNI to obtain the FQDN.

Strict: If the SNI does NOT match the CN or SAN fields in the returned server's certificate, FG closes the connection.

Disable: FG does not check the SNI.

NEW QUESTION 72

Refer to the exhibit, which contains a TCL script configuration on FortiManager.

Type	TCL Script
Run script on	Remote FortiGate ...
Script details	<pre>#!/ proc do_cmd [cmd] { puts [exec "\$cmd\n" "# " 10] } run_cmd "config system interface " run_cmd "edit port1" run_cmd "set ip 10.0.1.10 255.255.255.0" run_cmd "next" run_cmd "end"</pre>

An administrator has configured the TCL script on FortiManager, but failed to apply any changes to the managed device after being executed. Why did the TCL script fail to make any changes to the managed device?

- A. Changes in an interface configuration can only be done by CLI script.
- B. The TCL script must start with #include <>.
- C. Incomplete commands are ignored in TCL scripts.
- D. The TCL command run_cmd has not been created.

Answer: D

NEW QUESTION 77

View the exhibit, which contains the output of a debug command, and then answer the question below.

```
# get router info ospf interface port4
port4 is up, line protocol is up
  Internet Address 172.20.121.236/24, Area 0.0.0.0, MTU 1500
  Process ID 0, Router ID 0.0.0.4, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DROther, Priority 1
  Designated Router (ID) 172.20.140.2, Interface Address 172.20.121.2
  Backup Designated Router (ID) 0.0.0.1, Interface Address 172.20.121.239
  Timer intervals configured, Hello 10.000, Dead 40, Wait 40, Retransmit 5
    Hello due in 00:00:05
  Neighbor Count is 4, Adjacent neighbor count is 2
  Crypt Sequence Number is 411
  Hello received 106, sent 27, DD received 7 sent 9
  LS-Req received 2 sent 2, LS-Upd received 7 sent 5
  LS-Ack received 4 sent 3, Discarded 1
```

Which of the following statements about the exhibit are true? (Choose two.)

- A. In the network on port4, two OSPF routers are down.
- B. Port4 is connected to the OSPF backbone area.
- C. The local FortiGate's OSPF router ID is 0.0.0.4
- D. The local FortiGate has been elected as the OSPF backup designated router.

Answer: BC

NEW QUESTION 80

A corporate network allows Internet Access to FSSO users only. The FSSO user student does not have Internet access after successfully logged into the Windows AD network. The output of the 'diagnose debug authd fssolist' command does not show student as an active FSSO user. Other FSSO users can access the Internet without problems. What should the administrator check? (Choose two.)

- A. The user student must not be listed in the CA's ignore user list.
- B. The user student must belong to one or more of the monitored user groups.
- C. The student workstation's IP subnet must be listed in the CA's trusted list.
- D. At least one of the student's user groups must be allowed by a FortiGate firewall policy.

Answer: AD

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD38828>

NEW QUESTION 84

View the exhibit, which contains the partial output of a diagnose command, and then answer the question below.

```
Spoke-2 # dia vpn tunnel list
list all ipsec tunnel in vd 0
name=VPN ver=1 serial=1 10.200.5.1:0->10.200.4.1:0
bound_if=3 lgwy=static/1 tun=intf/0 mode=auto/1 encap=none/0
proxyid_num=1 child_num=0 refcnt=15 ilast=10 olast=792 auto-discovery=0
stat: rxp=0 txp=0 rxb=0 txb=0
dpd: mode=on-demand on=1 idle=20000 ms retry=3 count=0 seqno=0
natt: mode=none draft=0 interval=0 remote_port=0
proxyid=VPN proto=0 sa=1 ref=2 serial=1
  src: 0:10.1.2.0/255.255.0:0
  dst: 0:10.1.1.0/255.255.255.0:0
  SA: ref=3 options=2e type=00 soft=0 mtu=1438 expire=42403/0B replaywin=2048 seqno=1 esn=0
replaywin_lastseq=00000000
life: type=01 bytes=0/0 timeout=43177/43200
dec: spi=ccc1f66d esp=aes key=16 280e5cd6f9bacc65ac771556c464ffbd
  ah=shal key=20 c68091d68753578785de6a7a6b276b506c527efe
enc: spi=df14200b esp=aes key=16 b02a7e9f5542b69aff6aa391738ee393
  ah=shal key=20 889f7529887c215c25950be2ba83e6fe1a5367be
dec:pkts/bytes=0/0, enc:pkts/bytes=0/0
```

Based on the output, which of the following statements is correct?

- A. Anti-reply is enabled.
- B. DPD is disabled.
- C. Quick mode selectors are disabled.
- D. Remote gateway IP is 10.200.5.1.

Answer: A

NEW QUESTION 85

Which statement about memory conserve mode is true?

- A. A FortiGate exits conserve mode when the configured memory use threshold reaches yellow.
- B. A FortiGate starts dropping all the new and old sessions when the configured memory use threshold reaches extreme.

- C. A FortiGate starts dropping new sessions when the configured memory use threshold reaches red
- D. A FortiGate enters conserve mode when the configured memory use threshold reaches red

Answer: D

NEW QUESTION 90

View the exhibit, which contains the output of a web diagnose command, and then answer the question below.

<pre># diagnose webfilter fortiguard statistics list</pre> <p>Raring Statistics:</p> <pre>===== DNS failures : 273 DNS lookups : 280 Data send failures : 0 Data read failures : 0 Wrong package type : 0 Hash table miss : 0 Unknown server : 0 Incorrect CRC : 0 Proxy requests failures : 0 Request timeout : 1 Total requests : 2409 Requests to FortiGuard servers : 1182 Server errored responses : 0 Relayed rating : 0 Invalid profile : 0 Allowed : 1021 Blocked : 3909 Logged : 3927 Blocked Errors : 565 Allowed Errors : 0 Monitors : 0 Authenticates : 0 Warnings : 18 Ovr request timeout : 0 Ovr send failures : 0 Ovr read failures : 0 Ovr errored responses : 0 ...</pre>	<pre># diagnose webfilter fortiguard statistics list</pre> <p>Cache Statistics:</p> <pre>===== Maximum memory : 0 Memory usage : 0 Nodes : 0 Leaves : 0 Prefix nodes : 0 Exact nodes : 0 Requests : 0 Misses : 0 Hits : 0 Prefix hits : 0 Exact hits : 0 No cache directives : 0 Add after prefix : 0 Invalid DB put : 0 DB updates : 0 Percent full : 0% Branches : 0% Leaves : 0% Prefix nodes : 0% Exact nodes : 0% Miss rate : 0% Hit rate : 0% Prefix hits : 0% Exact hits : 0%</pre>
---	--

Which one of the following statements explains why the cache statistics are all zeros?

- A. The administrator has reallocated the cache memory to a separate process.
- B. There are no users making web requests.
- C. The FortiGuard web filter cache is disabled in the FortiGate's configuration.
- D. FortiGate is using a flow-based web filter and the cache applies only to proxy-based inspection.

Answer: C

NEW QUESTION 93

Refer to the exhibits.

```
config vpn ipsec phase1-interface
edit "user-1"
set type dynamic
set interface "port1"
set mode main
set xauthtype auto
set authusrgrp "Users-1"
set peertype any
set dhgrp 14 15 19
set proposal aes128-sha256 aes256-sha384
set psksecret <encrypted_password>
next
```

Which contain the partial configurations of two VPNs on FortiGate. An administrator has configured two VPNs for two different user groups. Users who are in the Users-2 group are not able to connect to the VPN. After running a

diagnostics command, the administrator discovered that FortiGate is not matching the user-2 VPN for members of the Users-2 group. Which two changes must administrator make to fix the issue? (Choose two.)

- A. Use different pre-shared keys on both VPNs
- B. Enable Mode Config on both VPNs.
- C. Set up specific peer IDs on both VPNs.
- D. Change to aggressive mode on both VPNs.

Answer: CD

Explanation:

To set peer-id, the VPN must be set in aggressive mode - <https://community.fortinet.com/t5/FortiGate/Technical-Tip-How-to-use-Peer-IDs-to-select-an-IPSec-dialup/ta-p>

NEW QUESTION 95

An administrator has configured two FortiGate devices for an HA cluster. While testing the HA failover, the administrator noticed that some of the switches in the network continue to send traffic to the former primary unit. The administrator decides to enable the setting link-failed-signal to fix the problem. Which statement is correct regarding this command?

- A. Forces the former primary device to shut down all its non-heartbeat interfaces for one second while the failover occurs.
- B. Sends an ARP packet to all connected devices, indicating that the HA virtual MAC address is reachable through a new master after a failover.
- C. Sends a link failed signal to all connected devices.
- D. Disables all the non-heartbeat interfaces in all the HA members for two seconds after a failover.

Answer: A

NEW QUESTION 100

View these partial outputs from two routing debug commands:

```
# get router info kernel
tab=254 vf=0 scope=0 type=1 proto=11 prio=0 0.0.0.0/0.0.0.0/0->0.0.0.0/0 pref=0.0.0.0 gwy=10.200.1.254
dev=2(port1)
tab=254 vf=0 scope=0 type=1 proto=11 prio=0 0.0.0.0/0.0.0.0/0->0.0.0.0/0 pref=0.0.0.0 gwy=10.200.2.254
dev=3(port2)
tab=254 vf=0 scope=253 type=1 proto=2 prio=0 0.0.0.0/0.0.0.0/0->10.0.1.0/24 pref=10.0.1.254 gwy=0.0.0.0
dev=4(port3)
# get router info routing-table all
S* 0.0.0.0/0 [10/0] via 10.200.1.254, port1
    [10/0] via 10.200.2.254, port2, [10/0]
C 10.0.1.0/24 is directly connected, port3
C 10.200.1.0/24 is directly connected, port1
C 10.200.2.0/24 is directly connected, port2
```

Which outbound interface will FortiGate use to route web traffic from internal users to the Internet?

- A. Both port1 and port2
- B. port3
- C. port1
- D. port2

Answer: C

NEW QUESTION 101

In which two ways does FortiManager function when it is deployed as a local FDS? (Choose two.)

- A. It provides VM license validation services.
- B. It supports rating requests from non-FortiGate devices.
- C. It caches available firmware updates for unmanaged devices.
- D. It can be configured as an update server, a rating server, or both.

Answer: AD

NEW QUESTION 106

Which two statements about application-layer test commands are true? (Choose two.)

- A. Some of them display real-time application debugs.
- B. Some of them can be used to restart an application.
- C. Some of them display statistics and configuration information about a feature or process.
- D. Some of them only display output, after you run the diagnose debug console enable command.

Answer: BC

NEW QUESTION 108

What is the purpose of an internal segmentation firewall (ISFW)?

- A. It inspects incoming traffic to protect services in the corporate DMZ.
- B. It is the first line of defense at the network perimeter.
- C. It splits the network into multiple security segments to minimize the impact of breaches.
- D. It is an all-in-one security appliance that is placed at remote sites to extend the enterprise network.

Answer: C

Explanation:

ISFW splits your network into multiple security segments. They serve as a breach containers from attacks that come from inside.

NEW QUESTION 110

A FortiGate device has the following LDAP configuration:

```
config user ldap
  edit "WindowsLDAP"
    set server "10.0.1.10"
    set cnid "cn"
    set dn "cn=user, dc=trainingAD, dc=training, dc=lab"
    set type regular
    set username "cn=administrator, cn=users, dc=trainingAD,
dc=training, dc=lab"
    set password xxxxx
  next
end
```

The LDAP user student cannot authenticate. The exhibit shows the output of the authentication real time debug while testing the student account:

```
#diagnose debug application fnbamd -1
#diagnose debug enable
#diagnose test authserver ldap WindowsLDAP student password
fnbamd_fsm.c[1819] handle_req-Rcvd auth req 4 for student in WindowsLDAP
opt=27 prot=0
fnbamd_fsm.c[336]_compose_group_list_from_req_Group 'WindowsLDAP'
fnbamd_pop3.c[573] fnbamd_pop3_start-student
fnbamd_cfg.c[932] fnbamd_cfg-get_ldap_ist_by_server-Loading LDAP server
'WindowsLDAP'
fnbamd_ldap.c[992] resolve_ldap_FQDN-Resolved address 10.0.1.10, result 10.0.1.10
fnbamd_fsm.c[428] create_auth_session-Total 1 server (s) to try
fnbamd_ldap.c[1700] fnbamd_ldap_get_result-Error in ldap result: 49
(Invalid credentials)
fnbamd_ldap.c[2028] fnbamd_ldap_get_result-Auth denied
fnbamd_auth.c[2188] fnbamd_auth_poll_ldap-Result for ldap svr 10.0.1.10 is denied
fnbamd_comm.c[169] fnbamd_comm_send_result-Sending result 1 for req 4
fnbamd_fsm.c[568] destroy_auth_session-delete session 4
authenticate 'student' against 'WindowsLDAP' failed!
```

Based on the above output, what FortiGate LDAP settings must the administrator check? (Choose two.)

- A. cnid.
- B. username.
- C. password.
- D. dn.

Answer: BC

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=13141>

NEW QUESTION 112

An administrator has enabled HA session synchronization in a HA cluster with two members. Which flag is added to a primary unit's session to indicate that it has been synchronized to the secondary unit?

- A. redir.
- B. dirty.
- C. synced
- D. nds.

Answer: C

Explanation:

The synced sessions have the 'synced' flag. The command 'diag sys session list' can be used to see the sessions on the member, with the associated flags.

NEW QUESTION 117

An administrator has configured a FortiGate device with two VDOMs: root and internal. The administrator has also created an inter-VDOM link that connects both VDOMs. The objective is to have each VDOM advertise some routes to the other VDOM via OSPF through the inter-VDOM link. What OSPF configuration settings must match in both VDOMs to have the OSPF adjacency successfully forming? (Choose three.)

- A. Router ID.
- B. OSPF interface area.
- C. OSPF interface cost.
- D. OSPF interface MTU.
- E. Interface subnet mask.

Answer: BDE

NEW QUESTION 118

Refer to the exhibit, which shows the output of diagnose sys session stat.

```
NGFW-1 # diagnose sys session stat
misc info:      session_count=591 setup_rate=0 exp_count=0 clash=162
                memory_tension_drop=0 ephemeral=0/65536 removeable=0
delete=0, flush=0, dev_down=0/0 ses_walkers=0
TCP sessions:
    166 in NONE state
     1 in ESTABLISHED state
     3 in SYN_SENT state
     2 in TIME_WAIT state
firewall error stat:
error1=00000000
error2=00000000
error3=00000000
error4=00000000
tt=00000000
cont=00000000
ids_recv=00000000
url_recv=00000000
av_recv=00000000
fqdn_count=00000006
fqdn6_count=00000000
global: ses_limit=0 ses6_limit=0 rt_limit=0 rt6_limit=0
```

Which statement about the output shown in the exhibit is correct?

- A. There are two sessions that have not been removed in case of any out-of-order packets that arrive.
- B. There are 166 TCP sessions waiting to complete the three-way handshake.
- C. 162 sessions have been deleted because of memory page exhaustion.
- D. All the sessions in the session table are TCP sessions.

Answer: A

NEW QUESTION 123

Refer to the exhibit, which contains the output of a debug command.

```
# diagnose hardware sysinfo conserve
memory conserve mode:      on
total RAM:                 3040 MB
memory used:               2706 MB 89% of total RAM
Memory freeable:          334 MB 11% of total RAM
memory used + freeable threshold extreme: 2887 MB 95% of total RAM
memory used threshold red: 2675 MB 88% of total RAM
memory used threshold green: 2492 MB 82% of total RAM
```

If the default settings are in place, what can be concluded about the conserve mode shown in the exhibit?

- A. FortiGate is currently blocking all new sessions regardless of the content inspection requirements or configuration settings due to high memory use.
- B. FortiGate is currently allowing new sessions that require flow-based or proxy-based content inspection but is not performing inspection on those sessions.
- C. FortiGate is currently blocking new sessions that require flow-based or proxy-based content inspection.
- D. FortiGate is currently allowing new sessions that require flow-based content inspection and blocking sessions that require proxy-based content inspection.

Answer: C

NEW QUESTION 127

Refer to the exhibit, which shows the output of a BGP debug command.

```
FGT # get router info bgp summary
BGP router identifier 0.0.0.117, local AS number 65117
BGP table version is 104
3 BGP AS-PATH entries
0 BGP community entries

Neighbor      V    AS      MsgRcvd  MsgSent   TblVer   InQ  OutQ   Up/Down   State/PfxRcd
10.125.0.60   4  65060    1698     1756     103      0    0     03:02:49   1
10.127.0.75   4  65075    2206     2250     102      0    0     02:45:55   1
100.64.3.1    4  65501     101      115      0        0    0     never      Active

Total number of neighbors 3
```

What can be concluded about the router in this scenario?

- A. The router 100.64.3.1 needs to update the local AS number in its BGP configuration in order to bring up the BGP session with the local router.
- B. The State/PfxRcd for neighbor 100.64.3.1 will not change until an administrator on the local router adjusts the inbound route filtering so that prefixes received can be added to the RIB.
- C. All of the neighbors displayed are part of a single BGP configuration on the local router with the neighbor-range set to a value of 4.
- D. The BGP session with peer 10.127.0.75 is up.

Answer: D

NEW QUESTION 130

In which two states is a given session categorized as ephemeral? (Choose two.)

- A. A TCP session waiting for FIN ACK
- B. A UDP session with packets sent and received
- C. A UDP session with only one packet received
- D. A TCP session waiting for the SYN ACK

Answer: CD

NEW QUESTION 131

View the central management configuration shown in the exhibit, and then answer the question below.

```
config system central-management
  set type fortimanager
  set fmg "10.0.1.242"
  config server-list
    edit 1
      set server-type rating
      set server-address 10.0.1.240
    next
    edit 2
      set server-type update
      set server-address 10.0.1.243
    next
    edit 3
      set server-type rating
      set server-address 10.0.1.244
    next
  end
  set include-default-servers enable
end
```

Which server will FortiGate choose for antivirus and IPS updates if 10.0.1.243 is experiencing an outage?

- A. 10.0.1.240
- B. One of the public FortiGuard distribution servers
- C. 10.0.1.244
- D. 10.0.1.242

Answer: B

NEW QUESTION 136

An administrator has configured two FortiGate devices for an HA cluster. While testing HA failover, the administrator notices that some of the switches in the network continue to send traffic to the former primary device. The administrator decides to enable the setting link-failed-signal to fix the problem.

Which statement about this setting is true?

- A. It sends an ARP packet to all connected devices, indicating that the HA virtual MAC address is reachable through a new master after a failover.
- B. It sends a link failed signal to all connected devices.
- C. It disabled all the non-heartbeat interfaces in all HA members for two seconds after a failover.
- D. It forces the former primary device to shut down all its non-heartbeat interfaces for one second, while the failover occurs.

Answer: D

NEW QUESTION 138

Which of the following statements is true regarding a FortiGate configured as an explicit web proxy?

- A. FortiGate limits the number of simultaneous sessions per explicit web proxy use
- B. This limit CANNOT be modified by the administrator.
- C. FortiGate limits the total number of simultaneous explicit web proxy users.
- D. FortiGate limits the number of simultaneous sessions per explicit web proxy user The limit CAN be modified by the administrator
- E. FortiGate limits the number of workstations that authenticate using the same web proxy user credentials.This limit CANNOT be modified by the administrator.

Answer: B

Explanation:

https://help.fortinet.com/fos50hlp/52data/Content/FortiOS/fortigate-WAN-opt-52/web_proxy.htm#Explicit2

The explicit proxy does not limit the number of active sessions for each user. As a result the actual explicit proxy session count is usually much higher than the number of explicit web proxy users. If an excessive number of explicit web proxy sessions is compromising system performance you can limit the amount of users if the FortiGate unit is operating with multiple VDOMs.

NEW QUESTION 142

An administrator cannot connect to the GUI of a FortiGate unit with the IP address 10.0.1.254. The administrator runs the debug flow while attempting the connection using HTTP. The output of the debug flow is shown in the exhibit:

```
# diagnose debug flow filter port 80
# diagnose debug flow trace start 5
# diagnose debug enable

id=20085 trace_id=5 msg="vd-root received a packet(proto=6,
10.0.1.10:57459->10.0.1.254:80) from port3. flag [S], seq 3190430861, ack
0, win 8192"
id=20085 trace_id=5 msg="allocate a new session-0000008c"
id=20085 trace_id=5 msg="iprope_in_check() check failed on policy 0, drop"
```

Based on the error displayed by the debug flow, which are valid reasons for this problem? (Choose two.)

- A. HTTP administrative access is disabled in the FortiGate interface with the IP address 10.0.1.254.
- B. Redirection of HTTP to HTTPS administrative access is disabled.
- C. HTTP administrative access is configured with a port number different than 80.
- D. The packet is denied because of reverse path forwarding check.

Answer: AC

NEW QUESTION 146

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

NSE7_EFW-7.0 Practice Exam Features:

- * NSE7_EFW-7.0 Questions and Answers Updated Frequently
- * NSE7_EFW-7.0 Practice Questions Verified by Expert Senior Certified Staff
- * NSE7_EFW-7.0 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE7_EFW-7.0 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The NSE7_EFW-7.0 Practice Test Here](#)